

FEATURES

- *High reliability
- *Low leakage
- *Low forward voltage drop
- *High current capability
- *Glass passivated junction

MECHANICAL DATA


- *Case: Molded plastic
- *Epoxy: UL 94V -0 rate flame retardant
- *Lead: MIL-STD-202E, Method 208 guaranteed
- *Polarity: Color band denotes cathode end
- *Mounting position: Any
- *Weight: 0.38 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
 Single phase, half wave, 60 Hz, resistive or inductive Load.
 For capacitive load, derate current by 20%



DO-15

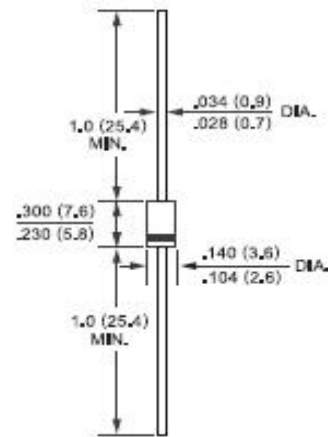

Dimensions in inches and (millimeters)

	SYMBOL	RL201G	RL202G	RL203G	RL204G	RL205G	RL206G	RL207G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at $T_A=75^\circ C$	I_O	2.0							Amps
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	70							Amps
Maximum Instantaneous Forward Voltage at 2.0ADC	V_F	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ $T_A=25^\circ C$	5.0							μ Amps
	@ $T_A=100^\circ C$	50							μ Amps
Maximum Full Load Reverse Current Average, Full Cycle .375"(9.5mm) lead length at $T_L=75^\circ C$	I_R	30							μ Amps
Typical Junction Capacitance (Note)	C_J	20							pF
Typical Thermal Resistance	$R_{\theta JA}$	40							$^\circ C/W$

NOTES: Measured at 1 MHZ and applied reverse voltage of 4.0 volts

RATING AND CHARACTERISTIC CURVES (RL201G THRU RL207G)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

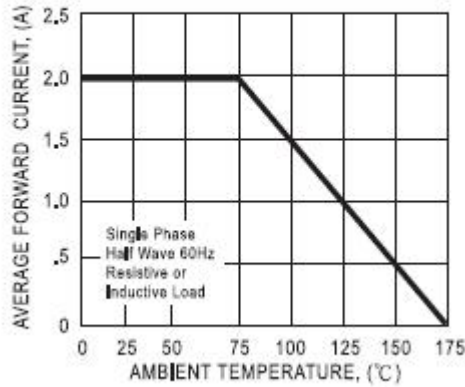


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

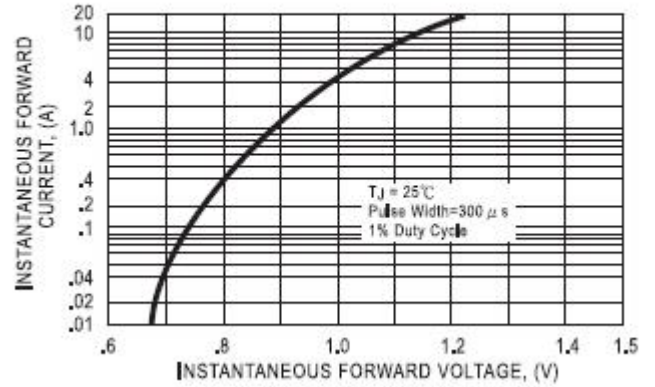


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

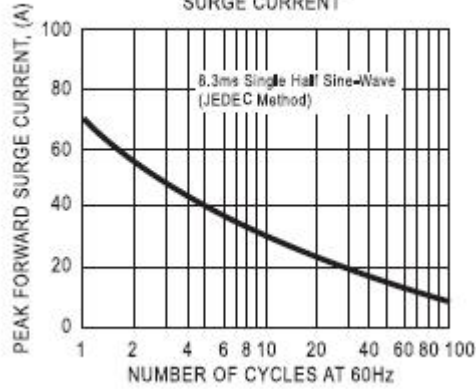


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

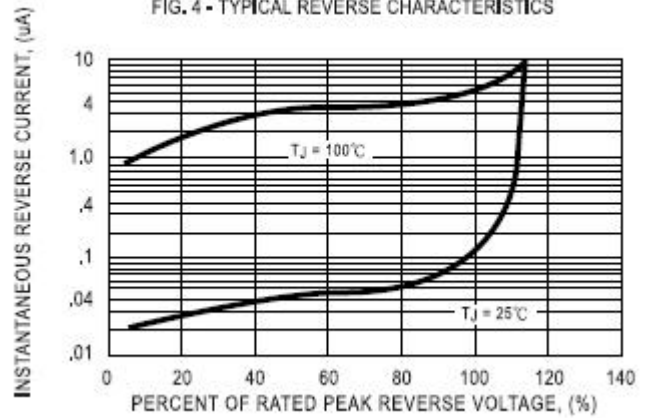


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

